



HOSHIZAKI

> DIM-30DE-2

Daily ice production capacity up to **40KG**

The DIM-30DE-2 produces and dispenses cube ice in a compact and space-saving design. The freshly produced ice does not come into contact with light or air during storage and thus retains the highest quality. The ice is very suitable for various environments such as food and beverage, catering, leisure and healthcare. The portion control can be easily adjusted so that the ice consumption of the end users can be easily regulated, so ideal for self-ser-




CUBE ICE DISPENSER

FEATURES

- > smart computer board technology
- > slide-in air filter for easy cleaning
- > compact design for limited space
- > stainless steel exterior provides a hygienic and high quality finish




UNIQUE ICE PRODUCTION SYSTEM

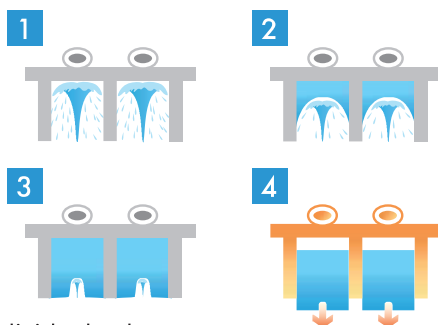


- > Individual cube
- > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks

ICE SIZE




DIMENSION & SPECIFICATION

CUBE ICE DISPENSER AIR SYSTEM

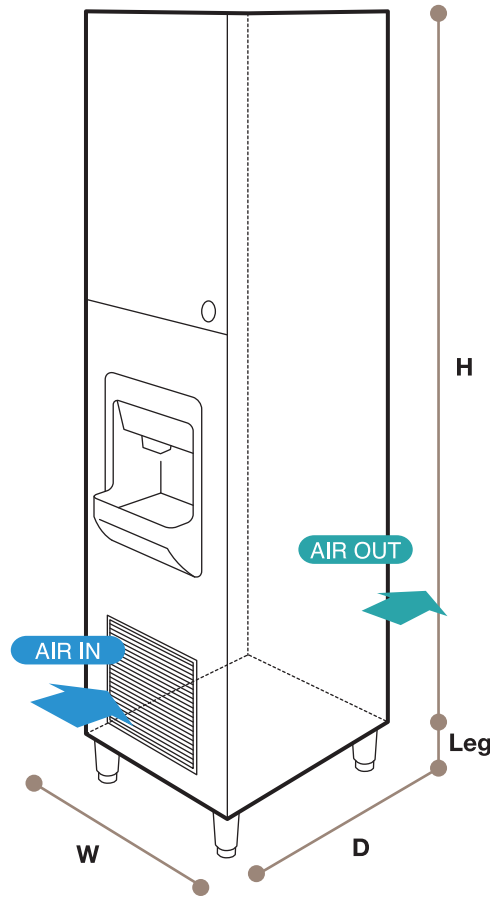

BACK SIDE

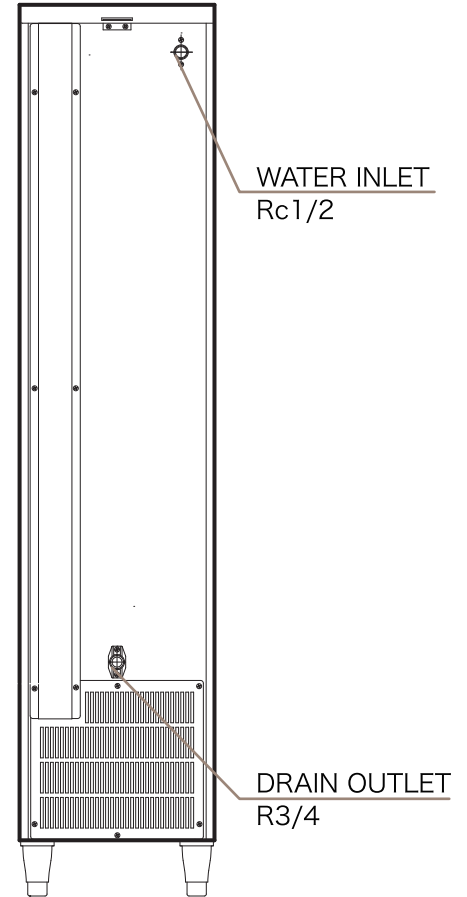

MODEL NAME		DIM-30DE-2
ICE DIMENSIONS (MM)		28 x 28 x 32
DIMENSIONS (MM)		Body : 350 x 526 x 1590 / Leg High : 90-135 mm
PACKED DIMENSIONS (MM)		450 x 730 x 1666
WEIGHT (NETT/GROSS)		65 KG / 80 KG
AMPERAGE / STARTING AMPERAGE		2.1 A / 13 A
ELECTRICAL CONSUMPTION		320 W
REFRIGERANT CHARGE		R134a
HEAT REJECTION		600 W (520 kcal/h)
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	40 KG
	(AT21°C/WT15°C)	36 KG
	(AT32°C/WT21°C)	28 KG
WATER CONSUMPTION PER 24H (AT32°C/WT15°C)		0.08 m ³
		2.8 L / 1 KG ICE
STORAGE CAPACITY		15 KG

• **WARRANTY:**
Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

OPERATING CONDITIONS: • Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C
• Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50/60 Hz



We reserve the right to make changes in specification and design without prior notice.

www.hoshizaki.com