



HOSHIZAKI



- > **FM-150KE**
- > **FM-150KE-50**

flake ice

daily ice production capacity of up to **150KG**



- > **FM-150KE-N**
- > **FM-150KE-50-N**

nugget ice

daily ice production capacity of up to **140KG**

- > FM-150KE
- > FM-150KE-N








- > FM-150KE-50
- > FM-150KE-N-50

Apart from drinks, ice is important for preservation. Hoshizaki's FM ice machines produce flakes that are 70% ice and 30% water and are primarily used for cooling purposes. It is also used in large facilities such as in healthcare, catering, supermarket chains or even cocktail bars.

FEATURES

- > Auger is made of doublehardened stainless steel. Combined with carbon bearings, they work optimally in a tough and wet environment. Benefits include longer product life expectancy and reduced maintenance costs.
- > 100% hfc free CO2 foam insulation maintains consistent temperature
- > smart computer board technology
- > stainless steel exterior
- > led error indicator for easy diagnosis
- > self-contained unit


UNIQUE ICE PRODUCTION SYSTEM

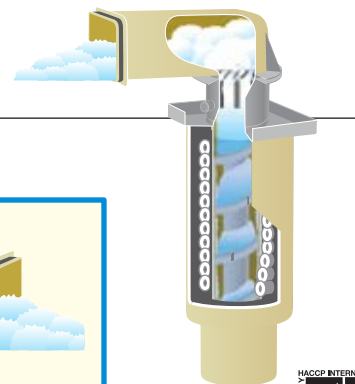


FLAKE ICE MAKER SERIES

DIMENSIONS & SPECIFICATION


TOP SIDE




FLAKE ICE MAKER AIR SYSTEM FM-150KE & FM-150KE-N




FRONT SIDE



RIGHT SIDE





BACK SIDE




FLAKE ICE MAKER AIR SYSTEM FM-150KE-50 & FM-150KE-50-N


TOP SIDE

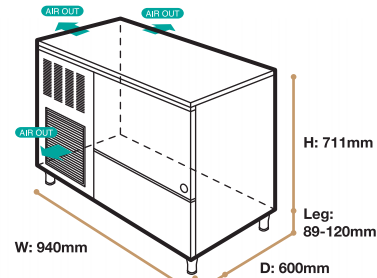


FRONT SIDE



RIGHT SIDE



BACK SIDE



MODEL NAME	FM-150KE	FM-150KE-N	FM-150KE-50	FM-150KE-50-N	
ICE SHAPE	Flake	Nugget	Flake	Nugget	
DIMENSIONS (MM) (W x D x H)	Body : 640 x 600 x 711 / Leg Height : 89-120 mm		Body : 940 x 600 x 711 / Leg Height : 89-120 mm		
PACKED DIMENSIONS (MM) (W x D x H)	746 x 706 x 887		1046 x 706 x 887		
WEIGHT (NETT/GROSS)	71 KG / 82 KG		81 KG / 94 KG		
AMPERAGE / STARTING AMPERAGE	5.1A / 20A				
ELECTRICAL CONSUMPTION	640 W				
REFRIGERANT CHARGE	R134a				
HEAT REJECTION	1120 W (963 kcal/h)				
ICE PRODUCTION PER 24H	(AT10C/WT10C)	150 KG	140 KG	150 KG	140 KG
	(AT21C/WT15C)	130 KG	120 KG	130 KG	120 KG
	(AT32C/WT21C)	110 KG	100 KG	110 KG	100 KG
WATER CONSUMPTION PER 24H (AT32C/WT21C)	0.110 m ³		0.110 m ³		
	1L / 1KG ICE		1L / 1KG ICE		
STORAGE CAPACITY	26 KG	32 KG	57 KG	65 KG	

• **WARRANTY:**
Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

• **OPERATING CONDITIONS:** • Voltage Range: 198V-254V • Ambient Temperature: 5°-40°C
• Water Supply: 5°-35°C / 0.05-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz