



HOSHIZAKI



> FM-480AKE

flake ice

daily ice production capacity of up to **500KG**



> FM-480AKE-N

nugget ice

daily ice production capacity of up to **430KG**



(With Hoshizaki Storage Bin - **B301SA**)






FLAKE ICE MAKER SERIES

Apart from drinks, ice is important for preservation. Hoshizaki's FM ice machines produce flakes that are 70% ice and 30% water and are primarily used for cooling purposes. It is also used in large facilities such as in healthcare, catering, supermarket chains or even cocktail bars.

FEATURES



- > Auger is made of doublehardened stainless steel. Combined with carbon bearings, they work optimally in a tough and wet environment. Benefits include longer product life expectancy and reduced maintenance costs.
- > 100% hfc free CO2 foam insulation maintains consistent temperature
- > smart computer board technology
- > stainless steel exterior
- > led error indicator for easy diagnosis

UNIQUE ICE PRODUCTION SYSTEM

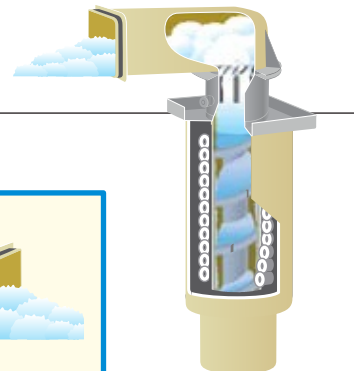


DIMENSIONS & SPECIFICATION


FLAKE ICE MAKER AIR SYSTEM

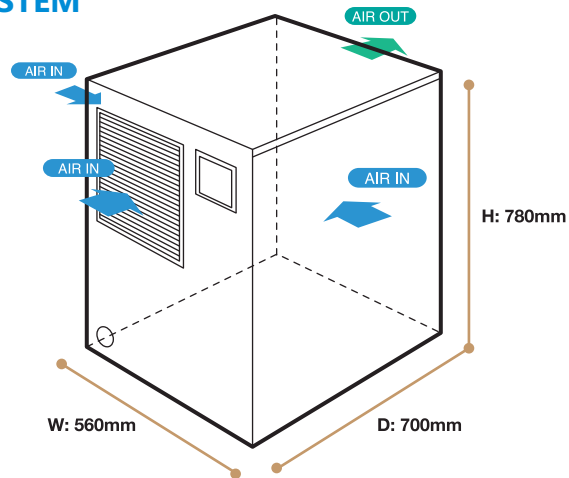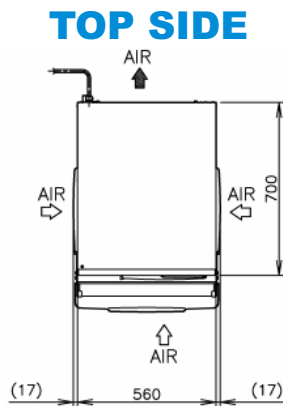


FRONT SIDE

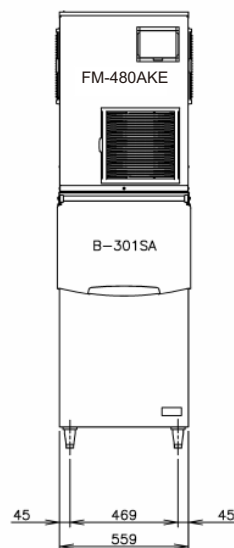

RIGHT SIDE

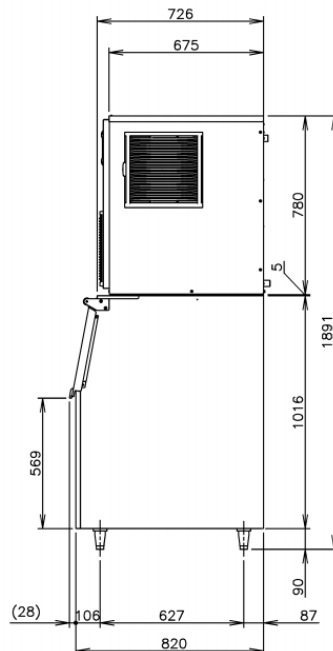

BACK SIDE

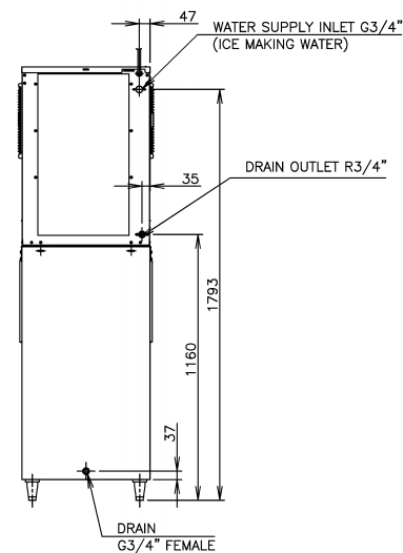

MODEL NAME		FM-480AKE	FM-480AKE-N
ICE SHAPE		Flake	Nugget
DIMENSIONS (MM) (W x D x H)		560 x 700 x 780	
PACKED DIMENSIONS (MM) (W x D x H)		671 x 820 x 971	
WEIGHT (NETT/GROSS)		95 KG / 102 KG	
AMPERAGE / STARTING AMPERAGE		8.4A / 43A	8.4A / 43A
ELECTRICAL CONSUMPTION		1650 W	
REFRIGERANT CHARGE		R404A	
HEAT REJECTION		3320 W (2854 kcal/h)	
ICE PRODUCTION PER 24H	(AT10C/WT10C)	500 KG	430 KG
	(AT21C/WT15C)	425 KG	360 KG
	(AT32C/WT21C)	325 KG	290 KG
WATER CONSUMPTION PER 24H (AT32C/WT21C)		0.355 m ³	0.320 m ³
		1.09L / 1KG ICE	1.10 L / 1KG ICE

• **WARRANTY:**

Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

• **OPERATING CONDITIONS:**

• Voltage Range: 198V-254V • Ambient Temperature: 5°-40°C
• Water Supply: 5°-35°C / 0.05-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz