



HOSHIZAKI



> FM-750AKE

flake ice


daily ice production capacity of up to **750KG**



> FM-750AKE-N

nugget ice

daily ice production capacity of up to **590KG**

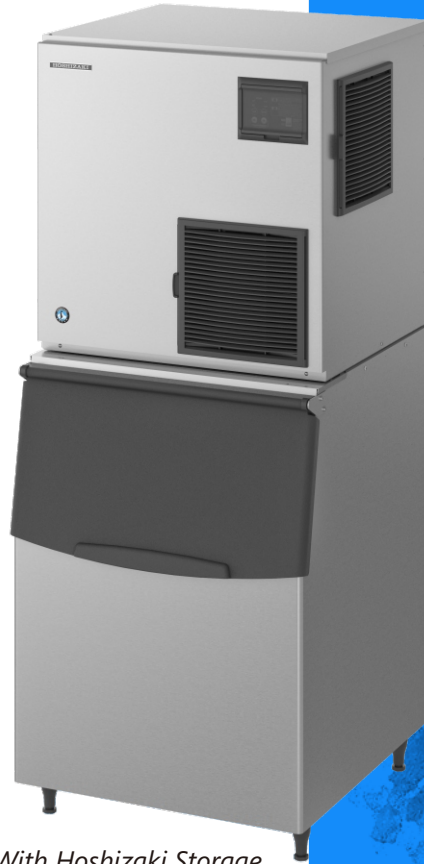

(With Hoshizaki Storage Bin - **B501SA**)






FLAKE ICE MAKER SERIES

Apart from drinks, ice is important for preservation. Hoshizaki's FM ice machines produce flakes that are 70% ice and 30% water and are primarily used for cooling purposes. It is also used in large facilities such as in healthcare, catering, supermarket chains or even cocktail bars.

FEATURES


- > Auger is made of doublehardened stainless steel. Combined with carbon bearings, they work optimally in a tough and wet environment. Benefits include longer product life expectancy and reduced maintenance costs.
- > 100% hfc free CO2 foam insulation maintains consistent temperature
- > smart computer board technology
- > stainless steel exterior
- > led error indicator for easy diagnosis

UNIQUE ICE PRODUCTION SYSTEM

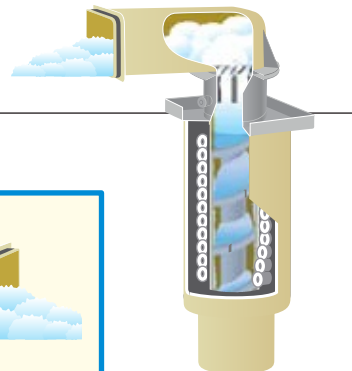


DIMENSIONS & SPECIFICATION


TOP SIDE




FLAKE ICE MAKER AIR SYSTEM

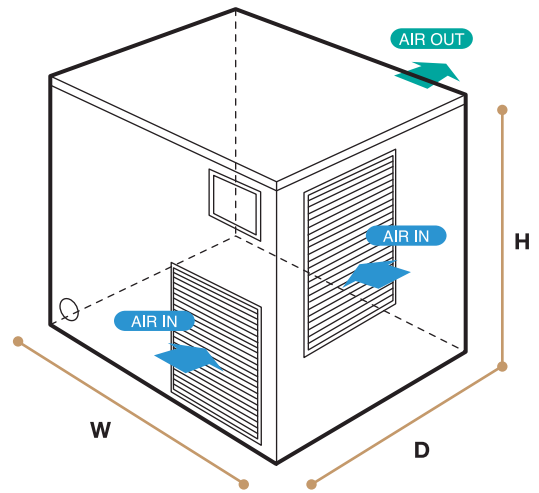


FRONT SIDE

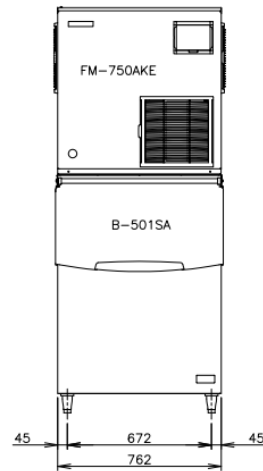

RIGHT SIDE

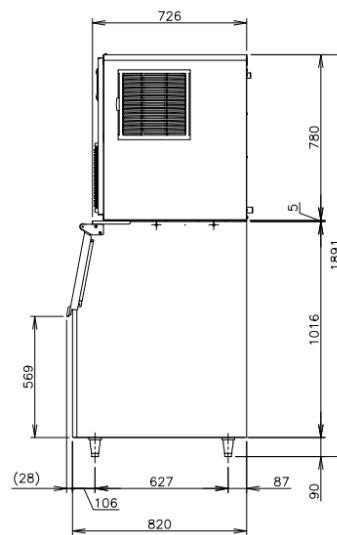

BACK SIDE

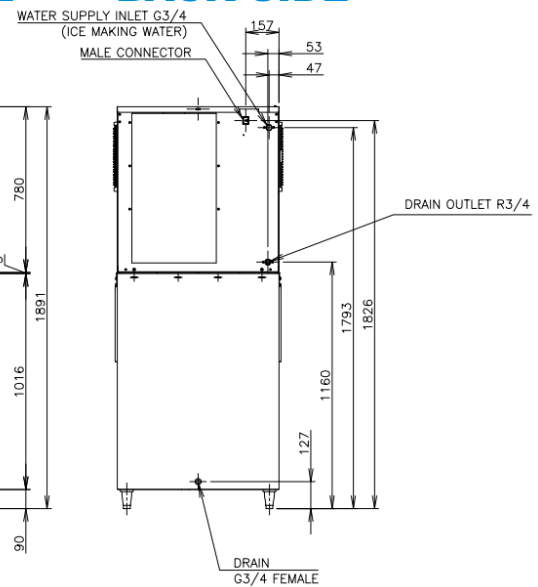

MODEL NAME		FM-750AKE	FM-750AKE-N
ICE SHAPE		Flake	Nugget
DIMENSIONS (MM)		762 x 700 x 780	
PACKED DIMENSIONS (MM)		873 x 820 x 947	
WEIGHT (NETT/GROSS)		133 KG / 143 KG	133 KG / 143 KG
AMPERAGE / STARTING AMPERAGE		9.2A / 43A	9.7A / 43A
ELECTRICAL CONSUMPTION		1880 W	2010 W
REFRIGERANT CHARGE		R404A	
HEAT REJECTION		3650 W (3138 kcal/h)	3650 W (3138 kcal/h)
ICE PRODUCTION PER 24H	(AT10°C/WT10°C)	750 KG	590 KG
	(AT21°C/WT15°C)	650 KG	500 KG
	(AT32°C/WT21°C)	530 KG	390 KG
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)		0.56 m ³	0.40 m ³
		1.06 L / 1KG ICE	1.03 L / 1KG ICE

WARRANTY:

Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 5°-40°C
• Water Supply: 5°-35°C / 0.05-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz

R1