


HOSHIZAKI

FEATURES

specially designed high-pressure pump installed assured with Hoshizaki's highest standards

uniquely designed parts to maximise performance yet are easily detachable for cleaning or maintenance


stable output of high temperature water for an efficient wash

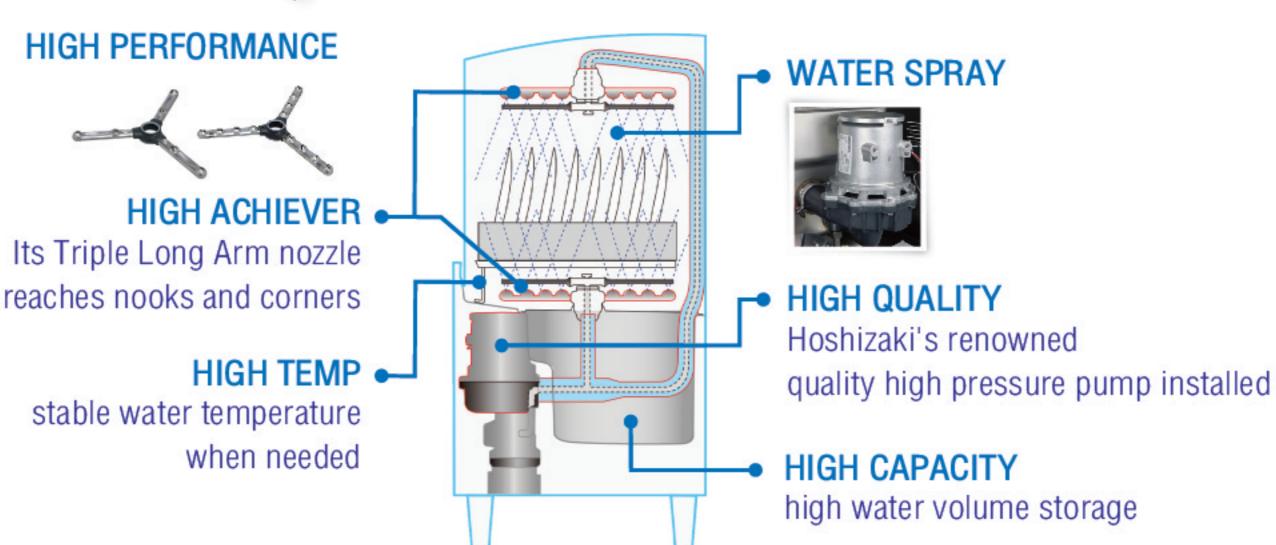

EASY TO CLEAN AND MAINTAIN

Parts are easily detachable to make cleaning a snap. No special or tools needed! Its rounded edges reduces stain and dirt traps within the tank.

Parts are designed symmetrically to fit both sides

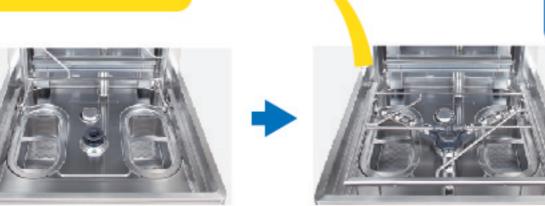





AND IT IS DURABLE!

- Stringent endurance test of 1 million door swings
- Robust and high quality stainless steel used



CLEAN UP QUICKLY

Normal Mode 1 Cycle

60 seconds

Washing 48s Water 60°C

Dwell 5s

Rinsing 6s Water 85°C

Dwell 1s


Long Mode 1 Cycle 120 seconds

Washing 108s Water 60°C

Dwell 5s


Rinsing 6s Water 85°C

Dwell 1s

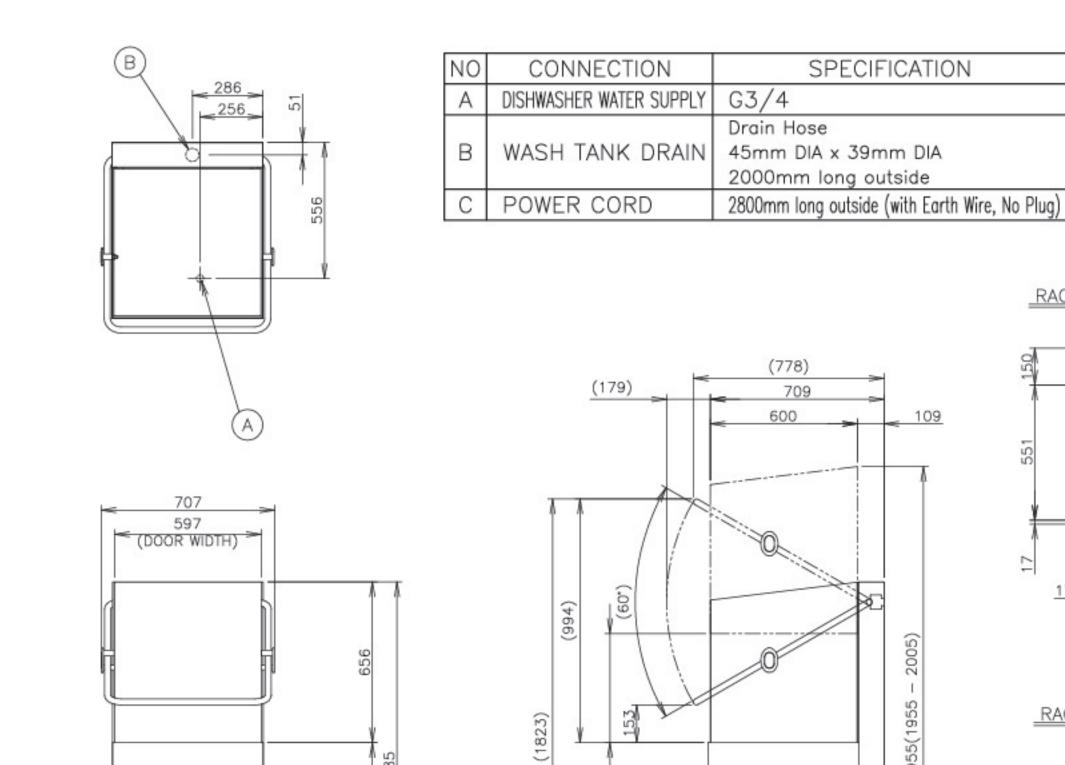

OPERATION PANEL

70

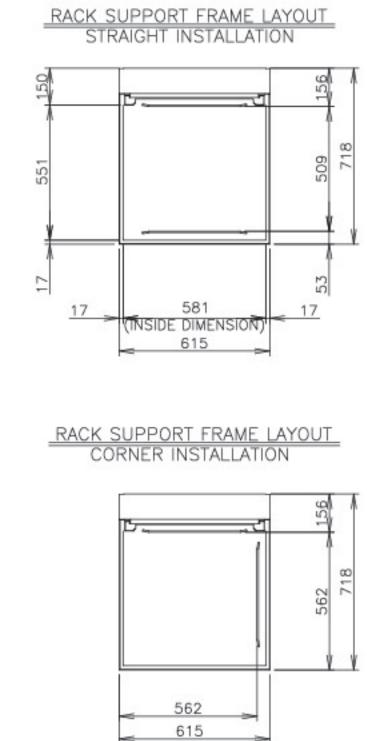

Model Name	HW-600A
Water consumption	2.0 L / rack
Water supply	Direct connection to water main 15°C (5 - 80°C)
Washing capacity	60 / 40 racks / h
Wash tank heater	3.0 kW
Booster tank heater	12.0 kW
Wash pump	710W / 1 Phase
Rinse pump	95W / 1 Phase
Wash tank capacity	22 L
Dimensions (mm)	W 615 x D 718 x H 1,485 (1,485-1,535)
Rack size (mm)	500 X 500
Power supply	3 Phase 4 Wire 380V 50Hz
Electric consumption	16.0kW
Door opening height	445 mm
Detergent / rinse aid feeder	Provided by detergent supplier
Drain pump model	Customized

469

716

79

Hoshizaki (Thailand) Limited

Bangkok Office

ON/OFF BUTTON

70

475

Phuket Office

Tel.: + (66)2-005-9980 - 83 Fax: +(66)2-516-2646

Tel.: + (66)76-626-566 Fax: +(66)76-686-566

www.hoshizaki.co.th

Hoshizaki - Thailand.Ltd