



# HOSHIZAKI

- > **IM-100CNE**
- > **IM-100CNE-21**
- > **IM-100CNE-23**

Daily ice production capacity up to **85KG**



Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer, The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.


CUBE ICE MAKER SERIES

## FEATURES

- > smart computer board technology
- > slide-in air filter for easy cleaning
- > LED error indicator for easy diagnosis
- > stainless steel exterior provides a hygienic and high quality finish




## UNIQUE ICE PRODUCTION SYSTEM

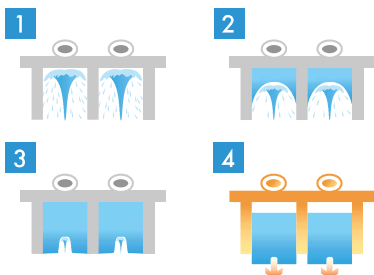


- > Individual cube
- > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks

## ICE SIZE

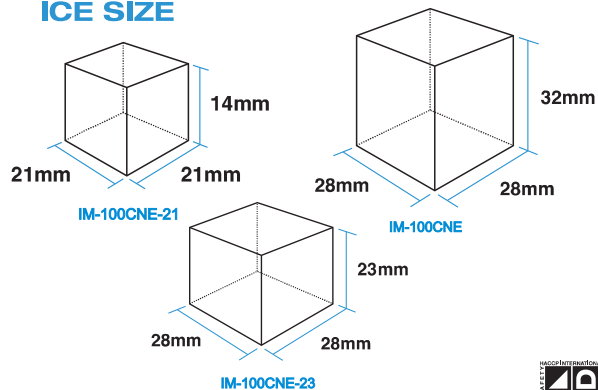


# DIMENSIONS & SPECIFICATION


## TOP SIDE

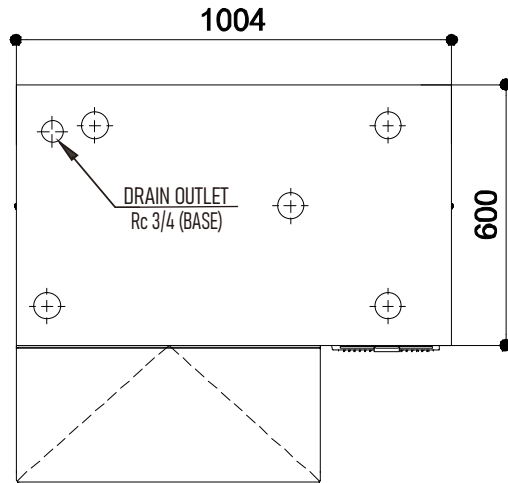


## BACK SIDE

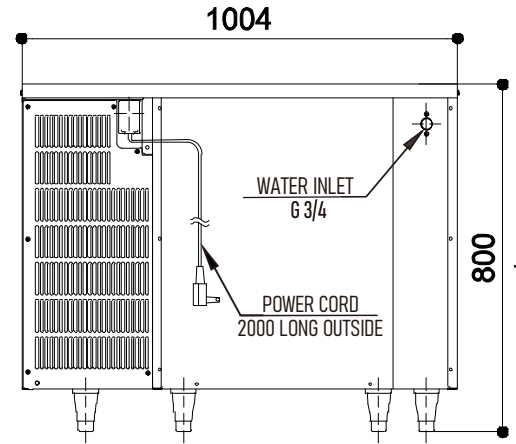

## FRONT SIDE

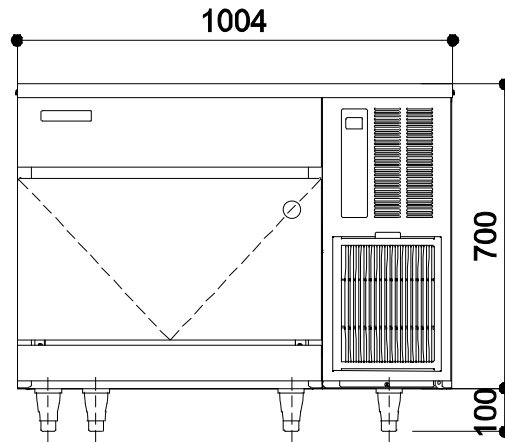

## RIGHT SIDE

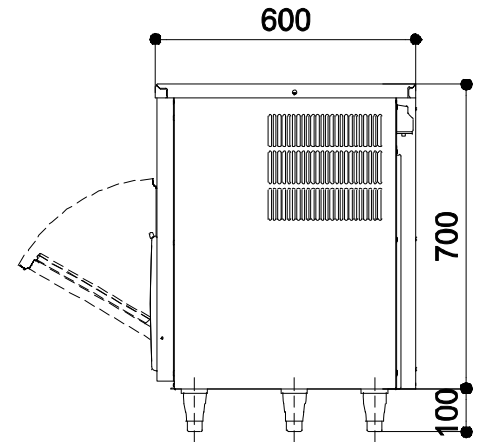

MODEL NAME	IM-100CNE	IM-100CNE-21	IM-100CNE-23	
ICE DIMENSIONS (MM) (W x D x H)	28 x 28 x 32	21 x 21 x 14	28 x 28 x 23	
DIMENSIONS (MM) (W x D x H)	Body: 1004 x 600 x 800 / Leg Height : 90-125 mm			
PACKED DIMENSIONS (MM) (W x D x H)	1110 x 700 x 875			
WEIGHT (NETT/GROSS)	77KG / 88KG			
AMPERAGE / STARTING AMPERAGE	4.1A / 19A			
ELECTRICAL CONSUMPTION	630 W			
REFRIGERANT CHARGE	R134a			
HEAT REJECTION (AT32°C/WT21°C)	1180 W(1015 kcal/h)			
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	95 KG	92 KG (7mm)	79 KG
	(AT21°C/WT15°C)	93 KG	87 KG (7mm)	77 KG
	(AT32°C/WT21°C)	84 KG	64 KG (7mm)	70 KG
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)		0,18 m <sup>3</sup>	0,23 m <sup>3</sup>	0,23 m <sup>3</sup>
		2,14L / 1KG ICE	3,59L / 1KG ICE	3,29L / 1KG ICE
ICE PRODUCTION (AT32°C/WT21°C)	FREEZE CYCLE TIME	36.5 MIN	26 MIN	30 MIN
	PER CYCLE	1.8 KG / 80 PCS	1.15 KG / 190 PCS	1.3 KG / 80 PCS
STORAGE CAPACITY	38 KG			

### • WARRANTY:

Two years parts & labour for entire unit, 3<sup>rd</sup> year on compressor only. Excluding door & exterior damages

**OPERATING CONDITIONS:** • Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C  
 • Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz  
 \*60Hz units are available upon request

We reserve the right to make changes in specification and design without prior notice.

www.hoshizaki.com