




HOSHIZAKI

> KM-40B

Daily ice production capacity up to **43KG**



This KM series ice maker produces clear, crescent shaped ice that is extremely versatile. It includes a double-sided stainless steel evaporator, which requires fewer cycles to produce a full bin of ice, thereby reducing energy consumption.




CRESCENT ICE MAKER SERIES

FEATURES

- > Individual premium crescent cube with no ice bridging.
- > Exceptionally hard crystal clear cubes that melt slowly.
- > Slide in air filter at front for easy cleaning maintaining performance efficiency.
- > Double-sided stainless steel evaporator for all water conditions produces more ice in less cycles.
- > Snap in water tank design - easy to remove for sanitization.
- > Durable stainless steel exterior.
- > Low water electrical consumption.
- > Flush mount to rear wall.
- > Good in hard water areas.



ICE SIZE




CERTIFICATION




DIMENSIONS & SPECIFICATION


TOP SIDE




FRONT SIDE

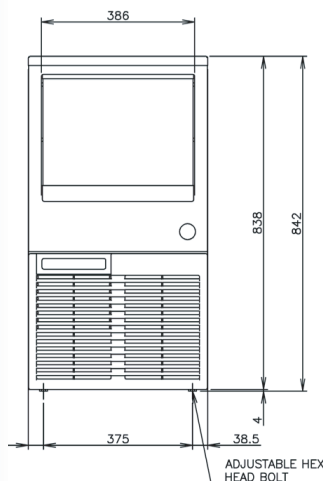

RIGHT SIDE

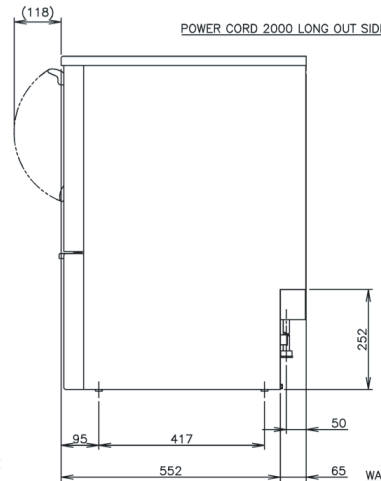

BACK SIDE

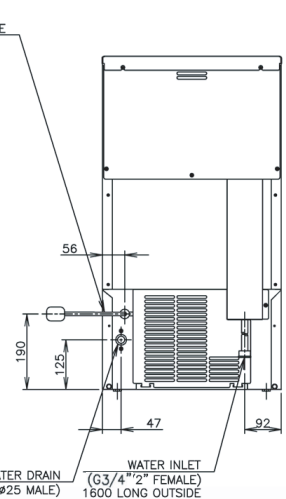

KM-40B	
ICE DIMENSIONS (WxDxH)	38.1 x 28.5 x 12.7 mm
DIMENSIONS (WxDxH)	452 x 617 x 842 mm
PACKAGE DIMENSIONS (WxDxH)	535 x 705 x 965 mm
WEIGHT (NET/GROSS)	40 KG / 50 KG
AMPERAGE / STARTING AMPERAGE	1.7A / 8.5A
ELECTRICAL CONSUMPTION (AT32°C/WT21°C)	278 W
REFRIGERANT CHARGE	R134a/ 140g
HEAT REJECTION (AT32°C/WT21°C)	620 W (533 kcal/h)
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C) 43 KG
	(AT21°C/WT15°C) 41 KG
	(AT32°C/WT21°C) 33 KG
ICE PRODUCTION PER CYCLE (AT32°C/WT21°C)	Approx. 0.78 KG / 80 pcs FREEZE CYCLE TIME PER CYCLE 32 minutes
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)	0.06 m ³ ≈ 1.8 L / 1 KG ice

NOTE:

All dimensions indicated are Width x Depth x Height in mm

*60Hz units are available on request

OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C • Water Supply: 5°-35°C / 0.07-0.78 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50Hz