




## **HOSHIZAKI**

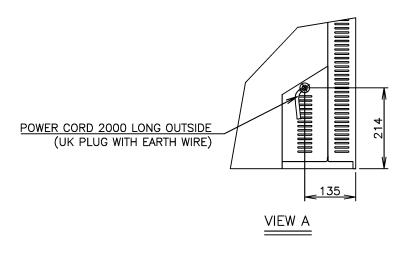





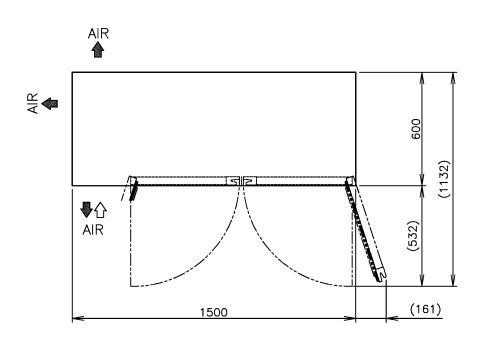

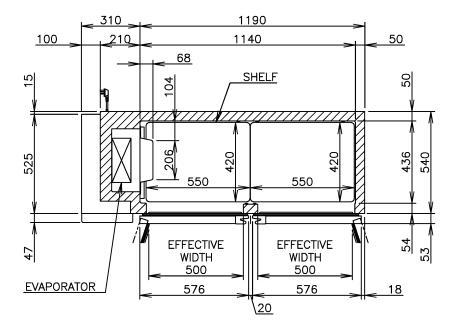

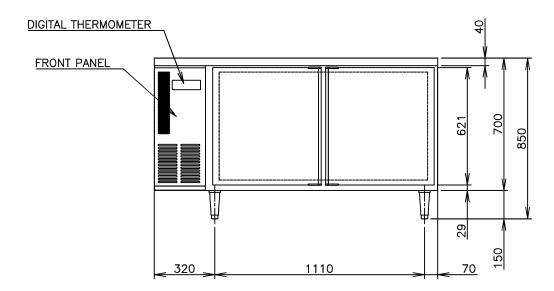





	ITEM	Hoshizaki Undercounter Refrigerator					
	MODEL	RT-156MA-S					
◬	POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)					
	AMPERAGE	Rated 2.0A					
◬	ELECTRIC CONSUMPTION	Motor 260W Heater 189W Refrigeration 245W Defrost 165W					
	HEAT REJECTION	*W					
	POWER CORD	2.0m (UK Plug with Earth Wire)					
	EFFECTIVE CAPACITY	318L					
	OUTSIDE DIMENSIONS	1500mm (W) x 600mm (D) x 850(-880) mm (H)					
	INSIDE DIMENSIONS	1140mm (W) x 436mm (D) x 599mm (H)					
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)					
	INTERIOR	Stainless Steel, ABS Plastic (Door)					
	INSULATION	Polyurethane Foam					
	INSULATION FOAM BLOWING AGENT	Cyclopentane					
	REFRIGERATION SYSTEM	Forced Air Circulation					
	DEFROST SYSTEM	Glass Tube Heater					
_	COMPRESSOR	Hermetic					
١	CONDENSER	Wire and Tube type, Air—cooled					
	EVAPORATOR	Fin and Tube Type					
	REFRIGERANT	R134a					
	TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C					
,	DEFROST CONTROL	Microprocessor controlled					
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire					
1	COMPRESSOR PROTECTION	Motor Protector					
	LEG	Plastic Adjustable 150 to 180mm					
	SHELF	4pcs.					
	WEIGHT	Net: 81kg (Gross: Approx. 86kg)					
	PACKAGE	Carton 1565mm (W) x 680mm (D) x 790mm (H)					
	ACCESSORIES	_					
◬	OPERATING CONDITIONS	Ambient Temperature: 5—38°C Voltage Range: Rated Voltage±6%					
	*We reserve the right t	n make changes in specifications and design without prior notice					

\*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C
- and power supply of 230V 50Hz.

  3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

  4. Product code: T265-C100 (HS)

APPROVED KAWAKAMI		HECKED WANG			awn Hang	SCALE 1	/20	TRIGONOMETRY	
LIUYIBO	UYIBO WX 2021.03.09		DATE		DRAWING NO.		SYMBOL		
APPROVED	DESIGNE	NED SYMBOL DATE			2019.03.01		D24614		<u> </u>