


1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product code: M032-C176

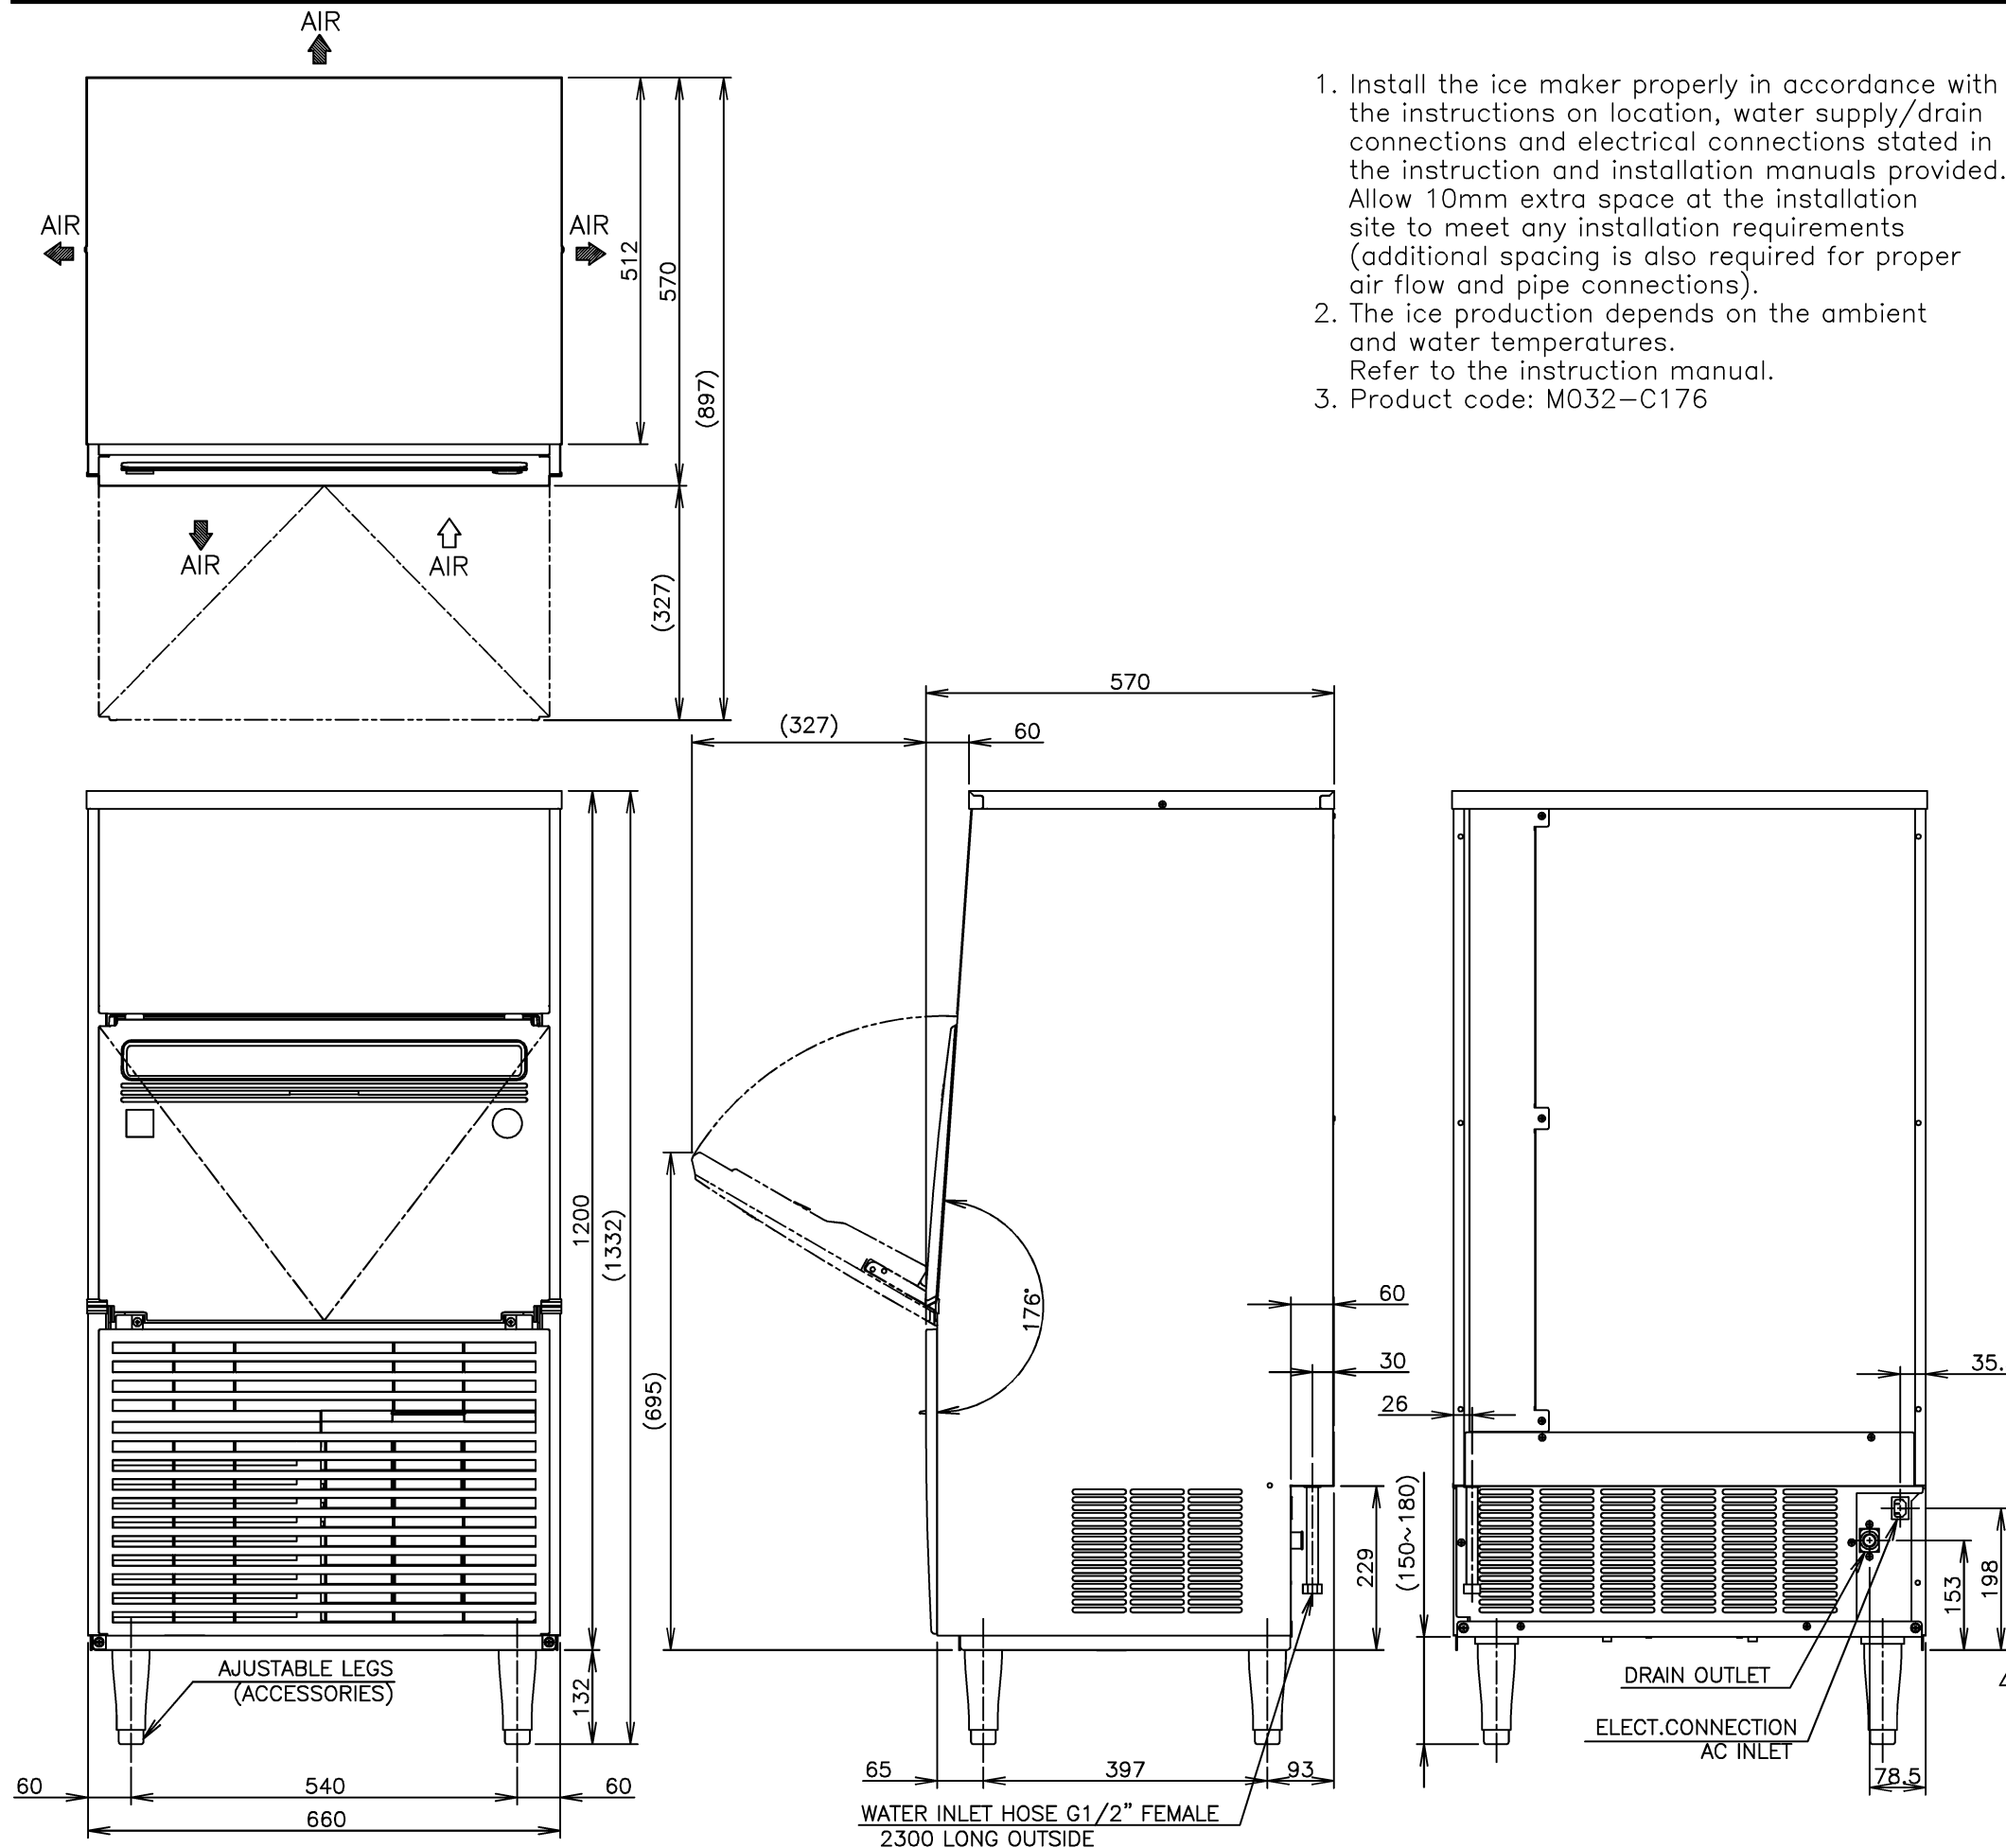

ITEM	Hoshizaki Cube Ice Maker	
MODEL	IM-130A-21	
POWER SUPPLY	1 PHASE 220-240V 50Hz Capacity: Min. 1.6kVA (6.9A)	
AMPERAGE	Running: 3.0A Rated Motor: 3.0A Starting: 25A	
ELECTRIC CONSUMPTION	Rated Motor: 675W (Power factor: 93%)	
ICE PRODUCTION PER 24h	Approx. 105kg (3mm)/(Ambient Temp.10° C, Water Temp.10° C) Approx. 100kg (3mm) (Ambient Temp.21° C, Water Temp.15° C) Approx. 75kg (3mm)/ (Ambient Temp.32° C, Water Temp.21° C)	
WATER CONSUMPTION PER 24h	Approx. 0.78m ³ (3mm)(Ambient Temp.10° C, Water Temp.10° C) Approx. 0.36m ³ (3mm)(Ambient Temp.21° C, Water Temp.15° C) Approx. 0.27m ³ (3mm)(Ambient Temp.32° C, Water Temp.21° C)	
SHAPE OF ICE	Cube Approx. 21 x 21 x 14mm	
FREEZE CYCLE TIME	Approx. 15min (3mm) (Ambient Temp.21° C, Water Temp.15° C)	
ICE PRODUCTION PER CYCLE	1.15kg/190pcs(3mm) (Ambient Temp.21° C, Water Temp.15° C)	
MAX STORAGE CAPACITY	Approx. 52kg (Bin Control Setting Approx. 34kg)	
OUTSIDE DIMENSIONS	660mm(W) x 570mm(D) x 1200mm(H)	
EXTERIOR	Stainless Steel, Plastic Door & Louver, Galvanized Steel(Rear)	
INSULATION	Polyurethane Foam	
INSULATION FOAM BLOWING AGENT	Cyclopentane	
CONNECTIONS - ELECTRIC	X-Type Connection	
CONNECTIONS - WATER SUPPLY	Inlet G1/2" (connected at rear side)	
CONNECTIONS-DRAIN	Outlet I.D. φ22mm (connected at rear side)	
ICE MAKING SYSTEM	Cell type	
HARVESTING SYSTEM	Hot Gas Defrost	
COMPRESSOR	Hermetic	
CONDENSER	Air-cooled	
HEAT REJECTION	1410W 1213kcal/h	
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells	
REFRIGERANT CONTROL	Thermostatic Expansion Valve	
REFRIGERANT CHARGE	R404A / 350g	
ICE MAKING CONTROL	Thermistor, Timer	
HARVESTING CONTROL	Thermistor	
BIN CONTROL	Microswitch (with Time Delay)	
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's Movement	
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse	
COMPRESSOR PROTECTION	Auto-reset Overload Protector	
ICE MAKER PROTECTION	Interlock by Controller Board	
WEIGHT	Net weight 69kg/Gross weight 76kg	
PACKAGE	Carton 760mm(W) x 680mm(D) x 1379mm(H)	
ACCESSORIES	Scoop, Leg, Installation Kit	
OPERATING CONDITIONS	Ambient Temp.:1-40°C,Water Supply Temp.:5-35°C Water Supply Pressure:0.07-0.78MPa(0.7-8bar) Voltage Range: Rated Voltage±6%	

*We reserve the right to make changes in specifications and design without prior notice.

HOSHIZAKI CUBE ICE MAKER IM-130A-21

APPROVED YAMASAKI	CHECKED NOTSU	DESIGNED NAGASAWA	DRAWN OHASHI	SCALE 1/10	TRIGONOMETRY
YAMAGUCHI APPROVED	ZHANG DESIGNED	2019.07.20 DATE	2018.11.06 DATE	D23817 DRAWING NO.	SYMBOL ⚠