
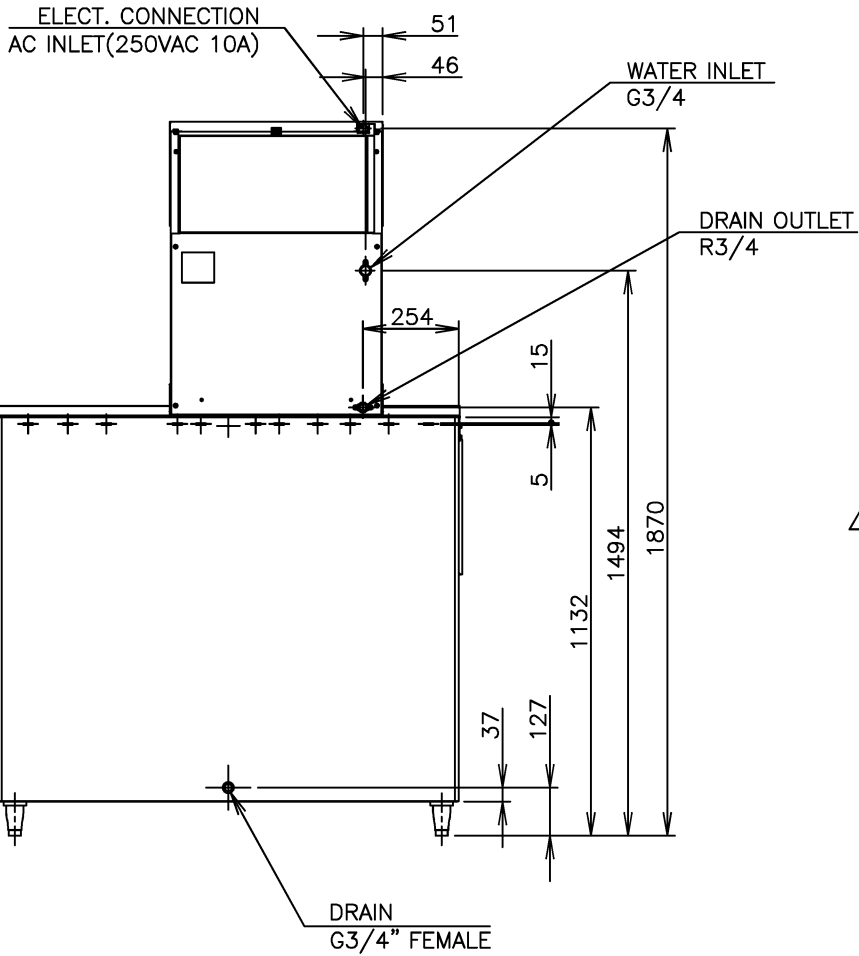
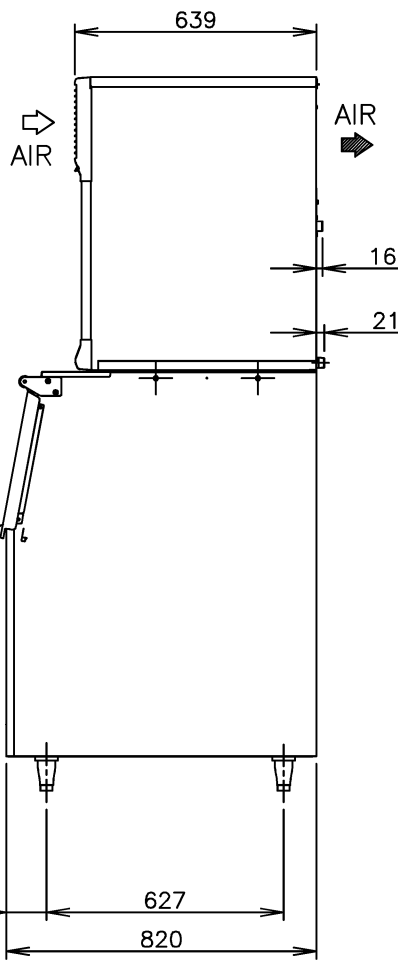
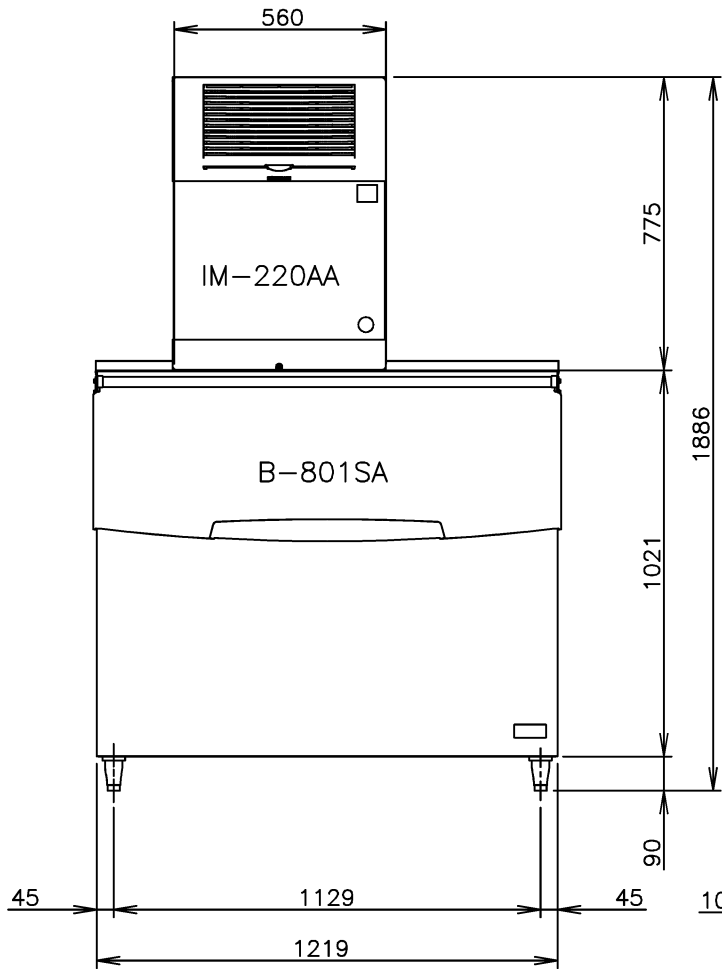


1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product code: M028, G008, S-21871, S-21872

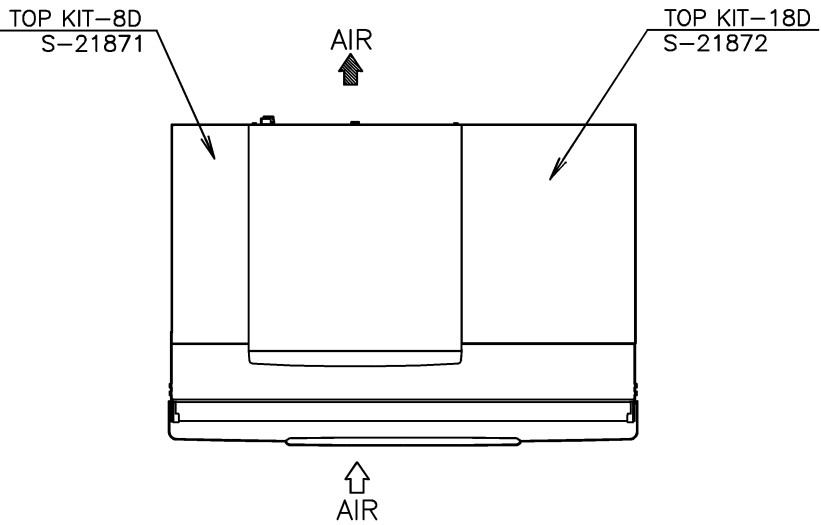

	ITEM	Hoshizaki Cube Ice Maker	
	MODEL	IM-220AA-B-301SA	
	AC SUPPLY VOLTAGE	1 PHASE 220-240V 50Hz	
△	AMPERAGE	5.3A (AT.32°C, WT.21°C)	
△	STARTING AMPERAGE	38A	
	ELECTRIC CONSUMPTION	950W (AT.32°C, WT.21°C)	
△	POWER FACTOR	76%	
△	POWER SUPPLY CAPACITY	Min. 2.4KVA (10A)	
	ICE PRODUCTION PER 24h	Approx. 190(5mm)/220(15mm)kg (AT.10°C, WT.10°C) Approx. 180(5mm)/200(15mm)kg (AT.21°C, WT.15°C) Approx. 160(5mm)/175(15mm)kg (AT.32°C, WT.21°C)	
	WATER CONSUMPTION PER 24h	Approx. 0.62m³(AT.10°C, WT.10°C) Approx. 0.31m³(AT.21°C, WT.15°C) Approx. 0.27m³(AT.32°C, WT.21°C)	
	SHAPE OF ICE	Cube Approx. 28×28×23mm	
	FREEZE CYCLE TIME	Approx. 23min (AT.21°C, WT.15°C)	
	ICE PRODUCTION PER CYCLE	Approx. 3.2kg/140.pcs (AT.21°C, WT.15°C)	
	MAX STORAGE CAPACITY	Approx. 286kg Maximum 348kg	
	DIMENSIONS	1219mm(W)×820mm(D)×1886mm(H)	
	EXTERIOR	Stainless Steel	
	BIN	EXTERIOR Stainless Steel, Galvanized Steel(Rear) Plastic Door INTERIOR Polyethylene	
	INSULATION FOAM BLOWING AGENT	Cyclopentane/CFC Free/ODP: 0/GWP: 3	
I	CONNECTIONS-ELECTRIC	X-Type Connection	
	CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)	
	CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)	
	ICE MAKING SYSTEM	Cell type	
	HARVESTING SYSTEM	Hot Gas Defrost	
	COMPRESSOR	Hermetic	
	CONDENSER	Air-cooled, Fin and Tube type	
△	HEAT REJECTION	2250W(1936kcal/h) (AT.32°C, WT.21°C)	
	EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells	
	REFRIGERANT CONTROL	Thermostatic Expansion Valve	
	REFRIGERANT CHARGE	R404A/500g	
	ICE MAKING CONTROL SYSTEM	Thermistor, Timer	Controller Board
	HARVESTING CONTROL SYSTEM	Thermistor	
	BIN CONTROL SYSTEM	Microswitch with Time Delay	
	ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement	
	ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse	
	COMPRESSOR PROTECTION	Auto-reset Overload Protector	
	ICE MAKER PROTECTION	Interlock by Controller Board	
	WEIGHT	ICE MAKER: Net weight 69kg/Gross weight 76kg BIN: Net weight 64kg/Gross weight 86kg	
	ACCESSORIES	Scoop, Leg(4 pcs), Installation Kit	
	OPERATING CONDITIONS	Ambient Temp.: 1 - 40°C, Water Supply Temp.: 5-35°C Water Supply Pressure: 0.7-7.8bar(0.07-0.78MPa),Voltage Range: Rated Voltage±6%	

* We reserve the right to make changes in specifications and design without prior notice.